

Mono

345W MBB Half-Cell Module

JAM60S10 325-345/MR/1500V Series

Introduction

Assembled with multi-busbar PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.



Higher output power



Lower LCOE




Less shading and lower resistive loss



Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

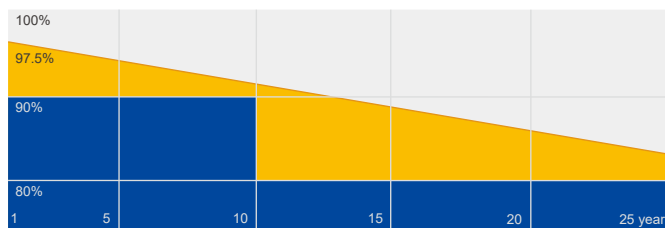


■ JA Linear Power Warranty ■ Industry Warranty

Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems



MECHANICAL DIAGRAMS

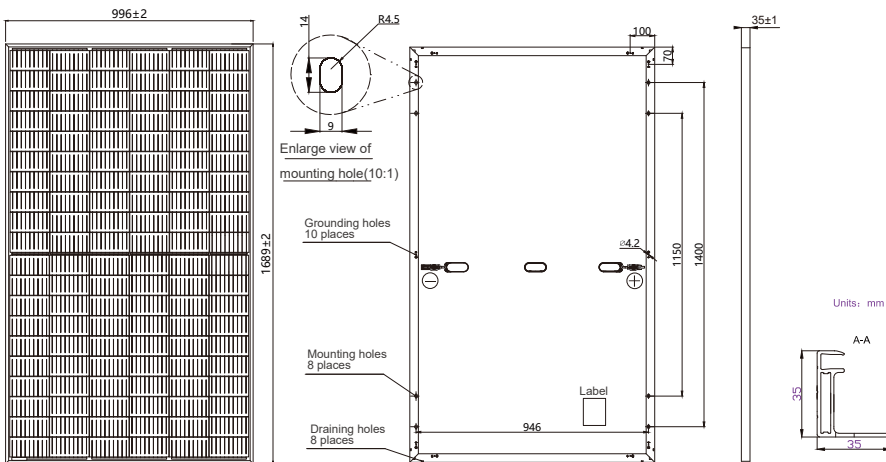

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	19.0kg±3%
Dimensions	1689±2mm×996±2mm×35±1mm
Cable Cross Section Size	4mm ²
No. of cells	120(6×20)
Cable Length (Including Connector)	Portrait:300mm(+)/400mm(-); Landscape:1000mm(+)/1000mm(-)
Connector	PV-KST4-EVO2/xy, PV-KBT4-EVO2/xy QC4.10-35/45
Country of Manufacturer	China/Vietnam

ELECTRICAL PARAMETERS AT STC

TYPE	JAM60S10 -325/MR/1500V	JAM60S10 -330/MR/1500V	JAM60S10 -335/MR/1500V	JAM60S10 -340/MR/1500V	JAM60S10 -345/MR/1500V
Rated Maximum Power(P _{max}) [W]	325	330	335	340	345
Open Circuit Voltage(V _{oc}) [V]	40.87	41.08	41.32	41.55	41.76
Maximum Power Voltage(V _{mp}) [V]	33.97	34.24	34.48	34.73	34.99
Short Circuit Current(I _{sc}) [A]	10.23	10.30	10.38	10.46	10.54
Maximum Power Current(I _{mp}) [A]	9.57	9.64	9.72	9.79	9.86
Module Efficiency [%]	19.3	19.6	19.9	20.2	20.5
Power Tolerance	0~+5W				
Temperature Coefficient of I _{sc} (α _{Isc})	+0.044%/°C				
Temperature Coefficient of V _{oc} (β _{Voc})	-0.272%/°C				
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C				
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G				


Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.
Measurement tolerance at STC: P_{max} ±3%, V_{oc} ±2% and I_{sc} ±4%.

ELECTRICAL PARAMETERS AT NOCT


TYPE	JAM60S10 -325/MR/1500V	JAM60S10 -330/MR/1500V	JAM60S10 -335/MR/1500V	JAM60S10 -340/MR/1500V	JAM60S10 -345/MR/1500V	OPERATING CONDITIONS	
Rated Max Power(P _{max}) [W]	245	249	253	257	261	Maximum System Voltage	1500V DC(IEC)
Open Circuit Voltage(V _{oc}) [V]	38.26	38.46	38.68	38.90	39.09	Operating Temperature	-40°C~+85°C
Max Power Voltage(V _{mp}) [V]	31.80	32.02	32.21	32.40	32.61	Maximum Series Fuse	20A
Short Circuit Current(I _{sc}) [A]	8.14	8.21	8.28	8.35	8.42	Maximum Static Load, Front	3600Pa, 1.5
Max Power Current(I _{mp}) [A]	7.70	7.78	7.85	7.93	8.00	Maximum Static Load, Back	1600Pa, 1.5
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G					NOCT	45±2°C
						Application Class	Class A

CHARACTERISTICS

Current-Voltage Curve JAM60S10-335/MR/1500V



Power-Voltage Curve JAM60S10-335/MR/1000V



Current-Voltage Curve JAM60S10-335/MR/1500V

